


Bounding Volumes

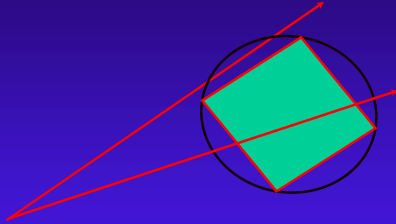

CSE 681

Bounding Volumes

Use simple volume

enclose object(s)

if ray doesn't intersect volume
it doesn't intersect what's inside

tradeoff for rays where there is
extra intersection test for

object intersections

volume intersections, but not object intersections

v.

quick test for no intersection for no volume intersection

CSE 681

Bounding Volumes

3 approaches:

Bound object

Bound screen area that object projects to

Bound area of world space

Can use hierarchical organization of bounding volumes

CSE 681

Bound Object

Easy-to-compute approximation to object

Easy to test for ray-bounding-object intersection

Trade-off complexity of computation v. tightness of fit

Can bound object in object space or world space

CSE 681


Axis Aligned Bounding Box

Easiest bounding volume to compute

Compute min/max for x, y, z of vertices

Some computational expense to test for intersection

Not tight fitting for some objects




CSE 681

Axis-Aligned Bounding box

```
limit[3][0] = 10000000000; limit[3][1] = -10000000000;  
for each point, for each dimensions
```

```
if p[i][j] < limit[j][0] then limitIndex[j][0] = i;  
if p[i][j] > limit[j][1] then limitIndex[j][1] = i;
```



CSE 681

6


Bounding Spheres

Takes some effort to compute optimal bounding sphere

Easy to compute approximation (non-optimal fit)

Easy to test for intersection (ray-sphere)

Not tight fitting for some objects




CSE 681

Bounding Spheres

Loop through points and record min/max in x,y,z

Use maximally separated pair of points and their midpoint as initial approximation to sphere

For each point in original set, adjust the bounding sphere to include the point




CSE 681

Bounding Spheres

limit[3][0] = -10000000000; limit[3][1] = 10000000000;
for each point, for each dimensions

if $p[i][j] < \text{limit}[j][0]$ then limitIndex[j][0] = i;
if $p[i][j] > \text{limit}[j][1]$ then limitIndex[j][1] = i;




CSE 681

9

Bounding Spheres

k=0;
if ($|\text{limit}[1][1]-\text{limit}[1][0]| > |\text{limit}[0][1]-\text{limit}[0][0]|$) k=1;
if ($|\text{limit}[2][1]-\text{limit}[2][0]| > |\text{limit}[k][1]-\text{limit}[k][0]|$) k=2;
midpoint = $(p[\text{limit}[k]]+p[\text{limit}[k]])/2$;
radius = $(p[\text{limit}[k]]-p[\text{limit}[k]])/2$;




CSE 681

10

Bounding Spheres

- For each point
 - if $p[i]$ is outside of radius of midpoint
 - radius = $(\text{radius} + \text{dist}(\text{midpoint}, p[i]))/2$
 - center = $p[i] + \text{radius} * (\text{center} - p[i]) / \|\text{center} - p[i]\|$;



CSE 681

11

Bounding Slabs


For each slab, user defines normal to use for slab pair

For each object, compute 2 d's for each N

Takes some effort to compute d's - how?


Takes some effort to test for intersection - how?

Can add more slabs to get tighter fit



CSE 681

Bounding Slabs

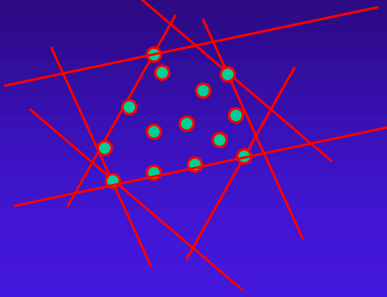


CSE 681

13

Bounding Slabs

SLAB: pair of parallel planes
for all points, compute $P \cdot N = d$
find min, max d for all points



CSE 681

Bounding Slabs

Slab defined by: $N, d1, d2$


- ray defined by $P(t) = P + tD$
- intersection with plane: $N \cdot P + t(N \cdot D) = d$
- for each slab
 - retrieve $d1, d2, N$
 - compute
 - $t1 = (d1 - N \cdot P) / (N \cdot D)$; $t2 = (d2 - N \cdot P) / (N \cdot D)$
 - keep track of entering max, exiting min
 - how to determine entering, exiting status?

CSE 681

15

Convex Hull

Smallest convex polyhedron containing object (point set)




Takes some effort to test for intersection - how?

CSE 681

Convex Hull


Find highest vertex
Find plane through vertex parallel to ground plane
Find second vertex that makes minimum angle with first vertex and up vector



CSE 681

Convex Hull


Find third vertex that makes plane whose normal makes minimum angle with up vector



CSE 681

Convex Hull


In the final convex hull, each edge will be shared by two and only two triangles
For each unmatched edge (until there are no more), find vertex that, when a triangle is formed with the edge, will minimize angle between its normal and normal of shared face



CSE 681

Hierarchical Bounding Volumes

Compute bounding volume for groups of objects



Compute bounding volume for groups of groups of objects

Test higher-level bound volumes first

CSE 681

Bound Area of Projection


Project object to picture plane

Bound columns and rows that object projects to

Only intersect first-level rays with pixels in projected area
i.e., only good for ray-casting part of ray-tracing

CSE 681

Bound Area of Projection

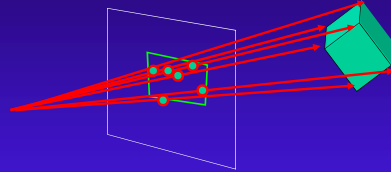


Project vertices onto picture plane

Find 2D bounding box on picture plane

CSE 681

Bound Area of Projection

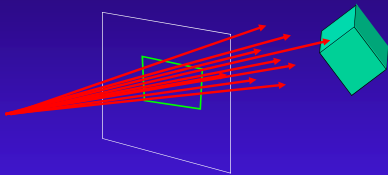


Project rays through pixels inside bound

Only test object that was bounded

CSE 681

Bound Area of Projection


Areas of projection can be grouped hierarchically



CSE 681

Bound Area, not Object


In 2D - it looks like this:



Bucket sort objects into cells

CSE 681

Bound Area of 3D World




Divide world space into cells

Dump objects into cells: an object is dumped into each cell it touches

CSE 681


Bound Area of World

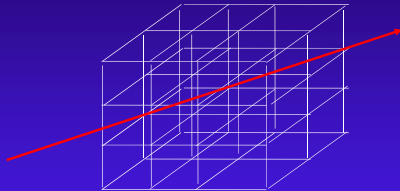

Trace ray through cells from closest to farthest
Intersect ray with each object in cell
Stop when it hits closest object in cell

CSE 681

Bound Area of World



Traverse cells in order – test all objects in cell


If no intersections, step to next cell

If one or more intersections, get closest intersection

CSE 681

Bound Area of World


Use octree (quadtree in 2D)



Hierarchical approach: cells, then subcells..
Takes significant coding to keep track of level
Overhead in popping up and down in hierarchy

CSE 681

Binary Spatial Partitioning

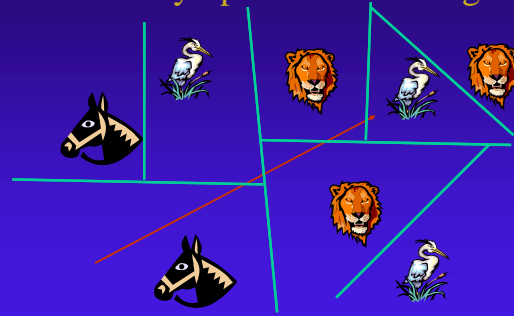

CSE 681